

SMARTSCREEN[®]

EXTERNAL SUNSCREEN

With **NEW**
Blackout
Channels



LUXAFLEX[®] WINDOW FASHIONS



SMARTSCREEN®

EXTERNAL SUNSCREEN

NOW ALSO AVAILABLE FOR INTERNAL APPLICATIONS


Universal fit headbox for face or reveal fit 120mm x 120mm headbox dimensions.

Spring loaded idler pin for easy installation

Stainless Steel cable guide enables top and bottom fixing only - spans between space.



View from inside the home.

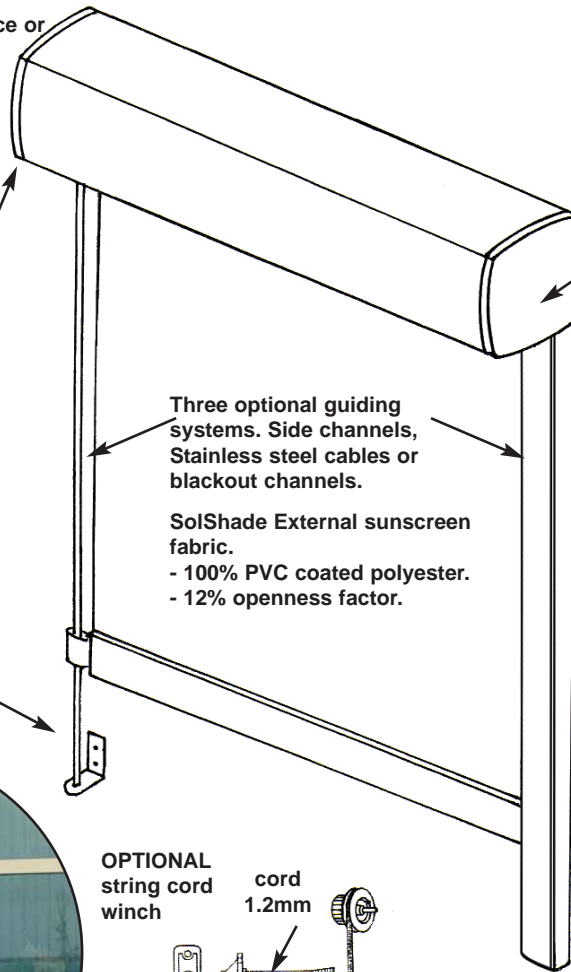

Three optional guiding systems. Side channels, Stainless steel cables or blackout channels.

SolShade External sunscreen fabric.
- 100% PVC coated polyester.
- 12% openness factor.

Standard colour is White Birch, available in a range of powder coated colours at a small extra cost.

Gear

Optional external crank and gear.

Crank handle

Black Out Channel

Std Side Channel



3 choices of operation:

- Externally with Crank Handle & Gear
- Internally using Winch and Cord
- Externally or internally using motorisation

Fabric gaps on side to allow air flow:

- Side Channel = 7mm
- Cable = 45mm
- Black Out Channel = 0mm

OPTIONAL string cord winch

cord 1.2mm

Guide Braid - Nylon

Cord winch

Winch handle

FABRIC OPTIONS & SIZE LIMITATIONS

Type of Application	Fabric Type	Type of Operation										
		Motorised				Crank & Gear			Cord & Winch			
		Min Drop	Max Drop	Min Width	Max Width	Min Drop	Min Width	Max Width	Min Drop	Max Drop	Min Width	Max Width
Internal	CALYPSO® PLUS	300	4000	800	3000	300	500	3000	300	2400	500	3000
	Twilight	300	4000	800	3000	300	500	3000	300	2400	500	3000
	Ultraflocke	300	4000	800	3000	300	500	3000	300	2400	500	3000
	Catalina	300	4000	800	3000	300	500	3000	300	2400	500	3000
External	SolShade	300	4000*	800	4000*	300	500	4000*	300	2400	500	3000
	Canvas	300	4000	800	2150	300	500	2150	300	2400	500	2150

Widths exceeding 2300 in SolShade fabric will have a horizontal join.

NOTE: External Sunscreen is also available on Internal applications.

NOTE: All figures are in mm.